




# UGY350PS

## UNIVPOWER SILENT SERIES

### POWER OUTPUT

Prime Rating — 280 kW (350 kVA)  
 Standby Rating — 320 kW (400 kVA)  
 3-Phase, 50 Hertz, 0.8 PF

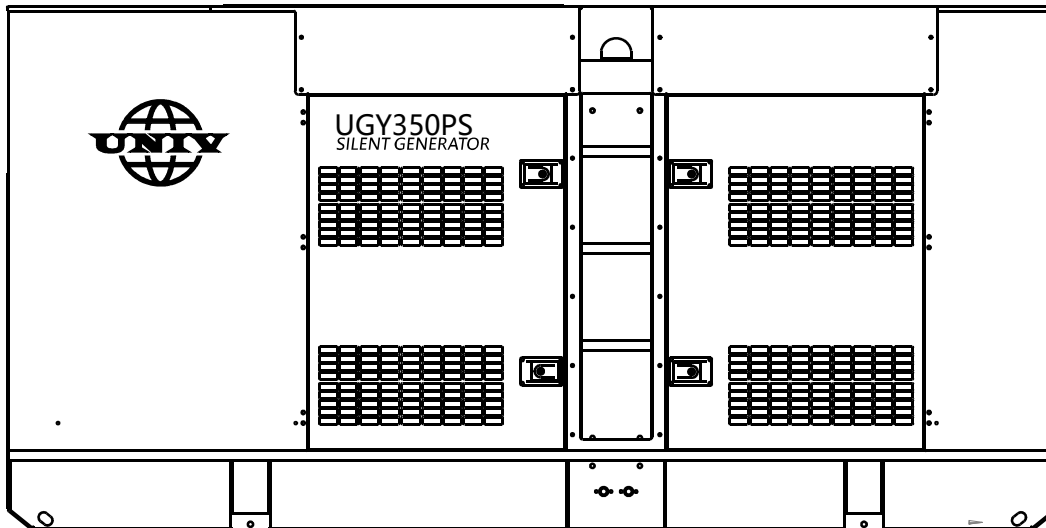

### STANDARD FEATURES

- Heavy duty, 4-cycle, variable speed fan, diesel engine provides maximum reliability.
- Brushless alternator reduces service and maintenance requirements. Class H protection.
  - Open delta alternator design provides virtually unlimited excitation for maximum motor starting capability.
  - Automatic voltage regulator (AVR) provides precise regulation.
- Electronic governor system maintains frequency to  $\pm 0.25\%$ .
- Full load acceptance of standby nameplate rating in one step
- Soundproof, weather resistant, steel housing provides operation at 82dB (A) at 7meters. Fully lockable enclosure allows safety operation. Outdoor operation available.
- Internal fuel tank with direct observing glass, and fuel level meter display on control panel  
 E-coat and powder coat paint provides durability and weather protection.
- Digital engine gauges including oil pressure, water temperature, battery volts, engine speed, and fuel level.
- Analog generator instrumentation including Ampere meter,
- Voltage meter, frequency meter, ammeter phase selector switch, voltmeter phase selector switch. Analog generator instrumentation and regulator adjustment.
- Deepsea/Comap professional generator controller.
  - High visibility LCD display with heated screen and alphanumeric readout.
  - IP65 Protection standard, operational temperature range of -40° to 85° C.
  - Modbus interface for gauge panel and expansion options.
  - DPF cleaning cycle indication.
  - Log record for inspection
- Automatic safety shutdown system monitors the water temperature, engine oil pressure, low coolant, low DEF, overspeed, and overcrank. Warning lights indicate abnormal conditions.
- Fuel/water separator. Removes condensation from fuel for extended engine life.
- Emergency stop switch — when manually activated, shuts down in any emergency.

### UNIVPOWER SILENT SERIES


#### UNIV POWER DECIBEL LEVELS

Revolving field, self ventilated weatherproof Normal conversation allows substantially lower operating noise levels than competitive designs. UNIVGensets good for home, construction sites, residential, hospital, etc.

- 90 — Subway / truck traffic
- 80 — Average city traffic
- 70 — Inside car at 60 mph
- 60 — Air conditioner at 6m
- 50 — Normal conversation

**82.0**  
DECIBELS

### GENERATOR OUTPUT PANEL

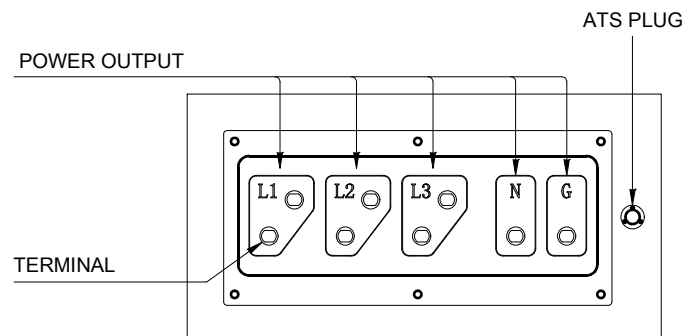



# UGY350PS

## UNIVPOWER SILENT SERIES

### SPECIFICATIONS

Generator Specifications	
Model	Revolving field, self-ventilated weatherproof
Armature Connection	Star with Neutral
Phase	3
Standby Output	320KW (400KVA)
Prime Output	280KW (350KVA)
Power Factor	0.8
Voltage Regulation (No load to full load)	±0.5%
Generator RPM	1500
Frequency	50 Hz
No. of Poles	4
Excitation	Brushless with AVR
Frequency Regulation: No Load to Full Load	Isochronous under varying loads from no load to 100% rated load
Frequency Regulation: Steady State	±0.25% of mean value for constant loads from no load to full load.
Insulation	Class H
Sound Level dB(A) Full load at 7M	82

Amperage	
Rated Voltage	Maximum Amps
3Ø Volt 230/400	505.2 Amps
3Ø Volt 220/380	531.8 Amps
Main Line Circuit Breaker Rating	630Amps
Over Current Relay Trip Set Point 400V Mode	700 Amps

Fuel System	
Fuel Tank Capacity	142.1 gallons (500 liters)
Fuel Consumption	L / h
At full load	75
At 3/4 load	57
At 1/2 load	37
At 1/4 load	25

Control system	
Controller Brand	Deepsea
Model	DSE6020
Module	Manual/Auto start/stop module
Standard function	Engine control
	Generator monitoring
	Generator protection
	Specification
Display	Frequency
	Battery voltage
	Running hour
Warning/shutdown	under/over voltage
	under/over speed
	under/over frequency
	Low oil pressure
	High water temperature
Communication port	USB

Engine Specifications	
Make / Model	Perkins / 2206C-E13TAG2
Emissions	/
Starting System	Electric
Design	4-cycle, water cooled, direct injection, Turbocharged
Displacement	12.5 liters
No. cylinders	6
Bore x Stroke	130 x 157 mm
Gross Engine Power Output	434 hp (324 kW)
Compression Ratio	16.3 : 1
Engine Speed	1500 rpm
Overspeed Limit	1725 rpm
Oil Capacity	3.3 gallons (12.5 liters)
Coolant Capacity	13.5 gallons (51.4 liters)
Battery	24V 120Ah x 2

Alternator	
Alternator Brand	Stamford/Mecc alte/Dingol
Alternator Model	HC1444E/ECO38 3L4A/DG444E
Excitation	Brushless, Self-Excited system
Capacity(KVA)	350kva
Power(KW)	280kw
Efficiency(%)	90%
Insulation class	Class H
Protection class	Ip23
Steady state voltage regulation	±1%
Voltage control	AVR

### WARRANTY\*

#### Generator

12 months from date of purchase or 1000 hours (whichever occurs first).



### NOTICE

Enough Air flow is extremely important to Generator operation. Improper connection can cause electrocution and/or property damage. Do not connect to any electrical system except through an approved device. Specifications are subject to change without notice.




# UGY350PS

## UNIVPOWER SILENT SERIES

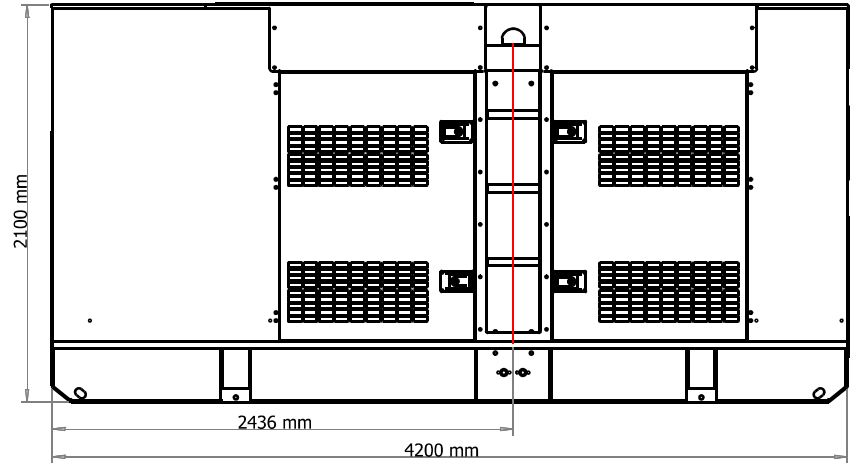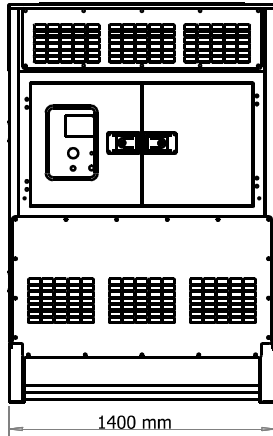

Weight	
Dry Weight	8,377 lbs. (3,800 kg)
Wet Weight	8,399 lbs. (3,810 kg)
Max. Lifting Point capacity	16,754 lbs. (7,600 kg)

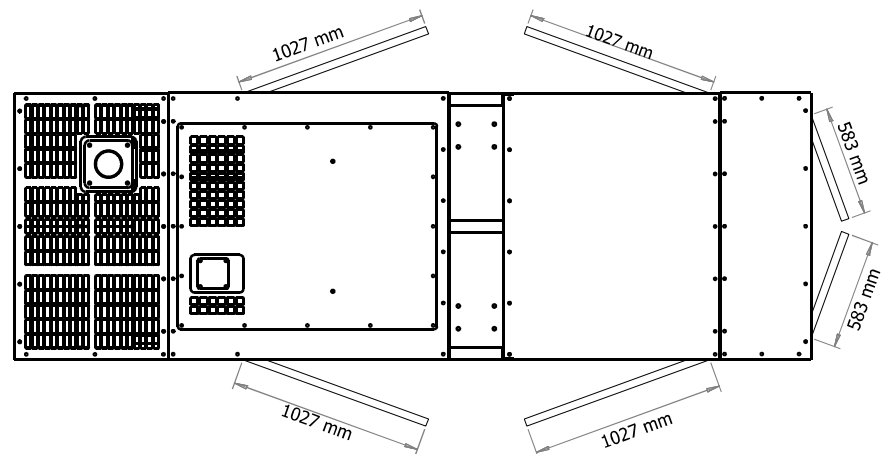

Manufactured by  
**Zhejiang Universal Machinery Co., Ltd**  
 Add: No 18-9 Nanshan Road, Qujiang Zone,  
 Quzhou city, Zhejiang Province, CN  
 Tel: 0086-570-3377022  
 Fax: 0086-570-3377023  
 Website: [www.univpower.com](http://www.univpower.com)